

CombiPack HDP

EN

ROUND BALER



CombiPack HDP

Round baler




Contents

Page

The drive	04 – 05
The KRONE EasyFlow pick-up	06 – 07
Best forage quality	08 – 11
Cutting unit and rotor	12 – 13
Bale chamber	14 – 15
Tying	16 – 17
Wrapping device	18 – 19
Hitch system and running gear	20 – 21
The KRONE operating terminals	22 – 23
Cleaning and maintenance	24 – 25
The KRONE net wraps and silage films	26 – 27
Technical data	28 – 29
Service and myKRONE.green	30 – 31

- **Maximum throughput**
up to 30 per cent higher throughput
- **Double twine tying system as standard**
for simple changeover directly in the cabin
- **Net and film connection**
both systems process nets and films
- **Spare blade drawer can be removed to side**
for safe and convenient access
- **Laterally folding film roll store** enables fast and easy roll replacement
- **Low maintenance gearbox drive**
including optimum power transmission
- **Triple drive system of the baling element**
guarantees reliable belt drive

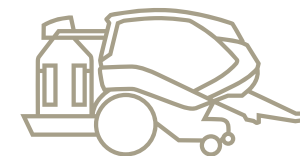

KRONE CombiPack HDP – redefining limits

The powerful KRONE CombiPack HDP round baler is setting new standards when it comes to throughput. The high baling density and consistently uniform bale shape ensure continuously efficient operation over long periods of time. The innovative short cut cutting system enables the cutting length to be adjusted accurately, thus ensuring the optimum length is always achieved. Innovative operation, automated processes and maximum power ensure the efficiency and precision of the system. In addition, the quick changeover from net to film make it particularly convenient and versatile for processing all types of crops.

*KRONE CombiPack HDP –
powerful technology for all crops!*

The drive

Convinces in every situation



Safe operation in all conditions

The endlessly wound mono belt ensures maximum power transmission thanks to the triple drive. Regardless of whether you are processing hay, straw or silage, this innovative drive concept rotates every crop material safely. Especially when working with damp crops, it reliably prevents the belt from slipping. This advanced technology not only contributes to the long life cycle and functionality of the machine, but also increases the reliability of the drive.




Well-designed drive concept

The CombiPack HDP is fitted with low maintenance and robust gearboxes that ensure reliable power transmission. The drive powers the main gearbox from the front where the power is then transmitted to another gearbox via a universal shaft. A laterally installed transfer gearbox directly transfers the power to a large cutting rotor. The belt drive rollers are also powered by a universal shaft. The triple drive of the baling element ensures a uniform rotation under all conditions. The well-designed drive concept ensures that the machine remains tidy. Oil lubrication is also not required thus preventing any soiling caused by oil.



Powerful


The coupling of the CombiPack HDP is tried and tested up to a torque of 5000 NM ensuring the reliable and safe transmission of power. This high level of protection guarantees robust and stable operation even in challenging conditions. Downtimes can thus be minimised, which in turn contributes to the efficiency and profitability of the harvest.

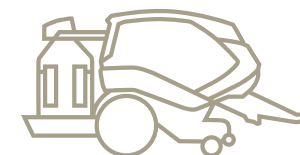

Maximum performance

- **Low maintenance gearbox drive** including maximum power transmission
- **Automatic central lubrication unit** provided as standard
- **Load Sensing hydraulic system**
- **Reliable belt drive concept**
- **Up to 5000 Nm torque** – robust and durable
- **PTO speed of 1000 rpm**

The CombiPack HDP 165 XC convinces with its particularly robust and low maintenance drive system. The Load Sensing technology always supplies the optimum amount of oil thus ensuring maximum efficiency with minimal wear. The automatic central lubrication is provided as standard and considerably reduces the amount of maintenance work, while the high-performance triple drive ensures a reliable crop flow without any slipping. Basically, the CombiPack HDP 165 XC stands for maximum productivity and durable technology.

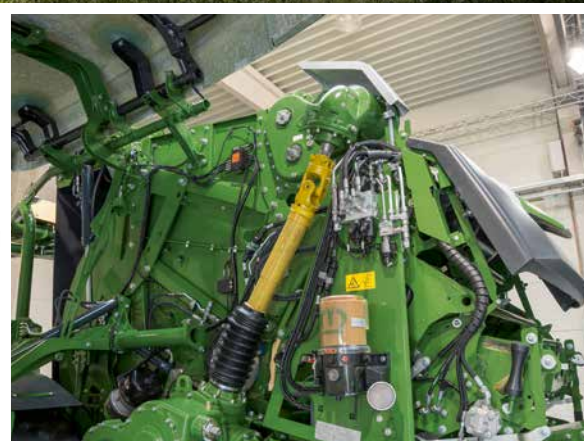

Robust and durable

The CombiPack HDP drive system is designed to be highly durable. In conjunction with the automatic central lubrication, a maximum level of efficiency and minimal amount of wear is guaranteed, which in turn has a positive impact on the service life of the drive system and maintenance intervals. This enables running costs to be reduced and productivity to be increased.




Load Sensing

The Load Sensing technology enables the CombiPack HDP to adjust the hydraulic oil pressure and flow rate to the requirements of the operating cycle thus ensuring maximum efficiency of all processes. This also preserves the tractor because it only has to pump hydraulic oil when it is actually required.

The KRONE EasyFlow pick-up

For a clean and efficient harvest!

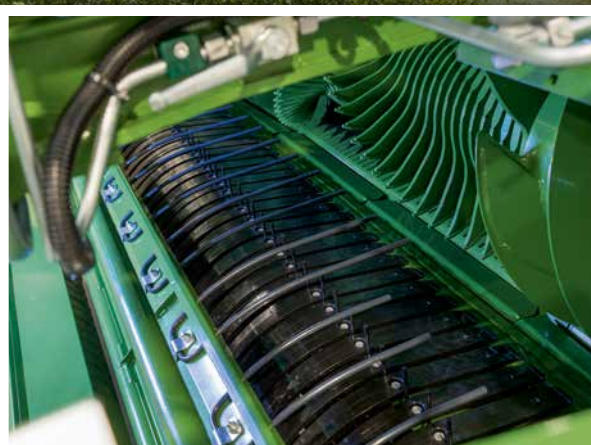

Pick-up drive


The EasyFlow pick-up with five rows of tines convinces with its accurate and careful intake of crops. It is driven by a reliably protected hydraulic motor which is installed directly in the pick-up and protected against overload. The drive enables a greater working width, trouble-free pick-up at optimum driving speed and maximum intake capacity. With a generous working width of 2235 mm in accordance with DIN standards, the pick-up is perfect for wide swaths and guarantees the efficient processing of large harvesting volumes.



Hydraulic drive

The integral hydro motor offers a number of advantages:

- More space for a larger working width of the pick-up
- Maintenance-free
- Longer pendulum paths compared to a chain drive
- Adaptation to the respective harvesting conditions by manually or automatically adjusting the speed, depending on the driving speed, via ISOBUS

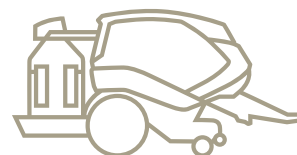



EasyFlow pick-up

- **Centrally-mounted pick-up**
for optimum ground contouring
- **Enormous oscillation radius of 140 mm**
for optimum ground contouring
- **Tool-free height adjustment**
of the crop press roller unit and pick-up
- **Robust design**
providing a long service life
- **Minimal wear**
low maintenance costs thanks to uncontrolled pick-up and maintenance-free hydraulic drive
- **Automatic or manual speed adjustment to the driving speed**

The KRONE EasyFlow pick-up is the unrivalled option for effective and clean forage intake. Its innovative and simultaneously simple design ensures efficient harvesting with minimal maintenance work. Even large and unevenly deposited swaths are picked up evenly and cleanly.



Optimum forage flow

The large crop press roller unit guarantees a continuous crop flow and prevents the forage from being pushed up in uneven swaths. The machine always operates at full power and at the maximum intake capacity ensuring an optimum forage intake.

Simple but ingenious

The EasyFlow pick-up convinces with its uncontrolled design that comprises a few moveable parts and quiet operation, which in turn keeps wear to a minimum. This reduces maintenance and service costs.

Completely balanced

The centralised suspension of the EasyFlow pick-up ensures that the weight is distributed evenly so that it adapts optimally to uneven ground. The large oscillation radius of 140 mm levels out any uneven ground with the guide wheels ensuring an even and optimum intake.

Quick and easy

The bearing pressure of the crop press roller unit and pick-up can easily be set via the tension springs. The tool-free chain adjustment means that the working height of the crop press roller unit can be adapted quickly and easily to achieve maximum performance.

Best forage quality

Rotor cutting unit XCut

Forage quality starts with technical expertise

Healthy animals, high forage intake and maximum milk yield – it all starts with the correct forage quality. With the CombiPack HDP round baler and the high-performance cutting unit with 41 blades, KRONE is setting new standards for uniform, structure and nutrient-preserving forage conditioning.



Cut

Unique on the market – clean and precise cutting of the stalks with a theoretical cutting length of just 27 mm – no other round baler offers this combination of shortness and uniformity.




Structure

Gentle conditioning under all conditions at any time of year.



Homogeneity

Uniform conditioning across the full width with minimal excess length.

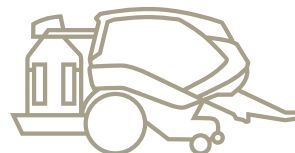

Advantages


Breakup behaviour

Shorter cutting lengths can be easily and quickly broken up in the forage mixer wagon, ensuring shorter mixing times and lower power requirements. This can reduce fuel consumption.



Cutting quality at the highest level

Length distribution with 41 blades

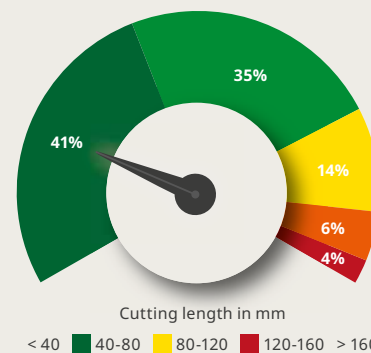

Homogeneity

Homogeneous forage reduces selection at the forage table. Excess length can be reduced to a minimum using the cutting unit. This has a positive effect on forage intake and milk yield.



Forage quality

Short cutting lengths result in higher compaction of the crop. This has a positive effect on the fermentation process.

Forage quality at a new level

Our customers



"The CombiPack HDP is setting new standards in the round baler sector. A very well-designed and powerful machine which makes daily use much easier."

Phillipe Albrecht
Contractor from Germany



"The cutting quality is truly unique. The mixing times for our automatic feeding system have been significantly reduced. Thanks to the homogeneous forage, the cows are much less selective at the forage table and their intake has increased."

Alex Dijkstra
Farmer and contractor from the Netherlands





"The harvesting windows are getting smaller and smaller and we need maximum throughput without compromising bale density and cutting quality. There is no comparable machine on the round baler market that achieves a higher bale output per hour"

Alexis Chapelain


Contractor Thierry Roger from France



"We work with the CombiPack HDP and are delighted. With its 41 blades, it delivers first-class cutting quality – and all this with a really high level of efficiency. It really pays off on slopes: bale transfer is reliable and, thanks to the single axle with 30.5 inch tyres, it is gentle on the soil. It's a real secret weapon for us!"

Christian Kühne

Contractor Rüegsegger AG from Switzerland

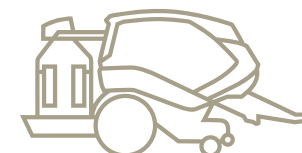

Cutting unit and rotor

The key to optimum forage quality

Precision with every cut

- **Top cutting quality achieved**
with shear cut principle
- **Blades are easy to change** thanks to removable spare blade drawer
- **Fast adaptation of the blades** thanks to blade pre-selection on the cutting unit
- **Safe activation and deactivation** of the blades from the tractor seat
- **Simple cleaning**
for added convenience

The CombiPack HDP cutting unit impresses with effective protection thanks to the single blade locking device and simple blade changing via the removable spare blade drawer. The blades are quickly adapted via the blade pre-selection directly on the cutting unit, while safe activation and deactivation is conveniently controlled from the tractor seat. In addition, the simple cleaning process provides extra convenience.



41 blades


The cutting unit of the KRONE CombiPack HDP is fitted with 41 blades, which means that a particularly short cutting length of 27 mm can be achieved. This not only improves the forage intake but also ensures the forage is more uniform as excess lengths are kept to a minimum. The efficient milling of the crops thus has a significant impact on the high forage quality and ensures uniform and optimum processing.

Throughput without loss

The integral rotor reliably accepts the crops from the pick-up and guides them through the blades. The large, integrated augers reliably convey the material to the centre of the rotor ensuring the perfect cut. The minimal distance between the blade and tines ensures an accurate and effortless shear cut principle.

Effective guard

The single blade locking device protects each individual blade against damage. If a blade encounters an obstruction, the spring enables it to avoid the obstruction and move downwards. The spring force then returns the blade to its original position. This increases the service life of the blades, thus resulting in lower maintenance costs and a higher level of efficiency.

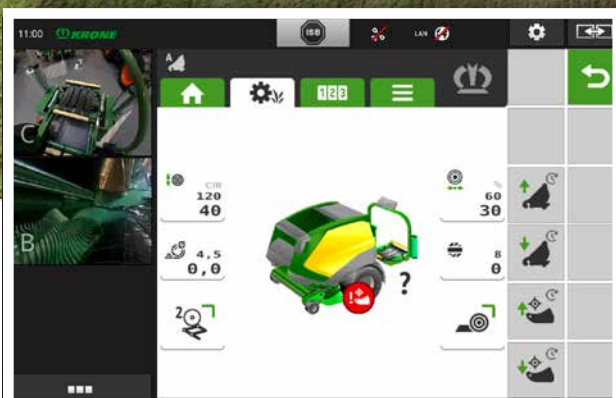

Central blade group control system

The desired cutting length can be set quickly and easily via the central blade group control system. The blade is pre-selected directly on the cutting unit. Depending on the application conditions, the number of blades can be quickly and conveniently adjusted in five groups (41/21/20/5/0). When the spare blade drawer is lifted, the selected blades are reliably pressed into the working position through the slotted base – even if the blade slots are soiled.



Crop blockage – not a problem

In the event of a crop blockage in the feed channel, the blade cassette can be lowered hydraulically from the cabin so that blockages can be cleared quickly and easily. The crops are transferred directly into the bale chamber so that no material remains on the field.



Practical blade changing

Blades are changed via the spare blade drawer that is provided as standard and can be pulled out of the left side of the machine. This makes it easy and convenient to change the blades and simple to clean.



Bale chamber

More pressure, increased efficiency

Shapes the bale

- **Fully variable bale chamber**
for flexible bale sizes
- **Three soft core settings**
- **Two cleaning rollers**
ensuring a permanently clean work environment
- **High performance mono belt**
for maximum bale density
- **Wide baling belt**
for minimal forage losses even if cutting lengths are short.

The **KRONE CombiPack HDP** is redefining the standards for baling density, efficiency and throughput rates. Dimensionally stable bales with a maximum baling density, high yields and the best possible quality of forage are achieved thanks to the well-designed technology hidden in the bale chamber. Thanks to the high throughput – up to 30% more than with conventional round balers – the machine processes large quantities in the shortest possible time.




The bale chamber

The fully variable bale chamber of the CombiPack HDP enables bales to be pressed with a diameter of 1.0 m to 1.65 m. The continuous setting on the terminal means that the required bale size can simply be adjusted. The baling force is optimally adjusted to the relevant harvest conditions to guarantee efficient and gentle baling and thus produce high-quality and dimensionally stable bales.

Compressing without losses

The high-performance continuous belt installed in the bale chamber ensures that a particularly high bale density and uniform bale shape is achieved. The enclosed surface across the entire width almost completely prevents rolling losses. In addition, the mono belt convinces with its long service life and very quiet operation.

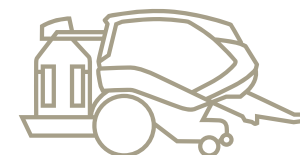



Safe start

The starter roller of the CombiPack HDP plays a deciding role when it comes to preparing the crops for the pressing process. It guarantees an even distribution and compression of the crops to achieve an optimum bale quality. The material is thus rotated as early as possible so that the bale is compressed from the outset.

Hard or soft?

The soft core setting can be used to adjust the firmness of the bale core individually in three zones. The pressure on the core is set in the terminal: A low value will produce a loose, soft core (particularly advantageous for hay), while a higher value produces a harder, compact core. The bale density is thus optimally adjusted to the crops, moisture and bale size.

Clean performance

Two cleaning rollers continuously clean the belt and deflection rolls. This permanently guarantees the reliable power transmission on to the belt for all crop materials.

Tying process that is

Accurate and versatile



Tying can be this simple

- **Two tying units**
to quickly change between net and peripheral film
- **Hydraulically folding role storage**
for long operating times
- **Retractable insert position on side**
to facilitate ergonomic working
- **Optimum film guide -**
secure completion, stable bales
- **Simple handling**
thanks to smart operation device and excellent accessibility

The CombiPack HDP 165 XC ensures the highest baling density and reliable bale tying with nets or film. The fast change, well designed roll concept and the ergonomically located insert position make it easy to handle, ensure downtimes are short and provide a first class result.



The double twine tying system

The CombiPack HDP is fitted with two tying systems, a key advantage when processing different crops such as silage and straw. The quick change from net to peripheral film is completed effortlessly directly from the tractor cabin, which noticeably improves productivity. The entire tying cycle can be conveniently controlled via the operating terminal.



Inserting wrapping and tying material is very easy!

Inserting net and peripheral film is particularly convenient and ergonomic thanks to the net chute, provided as standard, and the hydraulically accessible insert position. The low insertion position makes the process considerably easier. To replace the roll of net or peripheral film, the tying system must be folded forwards and the net chute swung out to the side and front. The control panel on the side can be used to move the tying system into the relevant position to simplify the change. The net roll can then be pushed into the first or second wrapping material holder via a roll without having to be lifted – a fast, simple and efficient process. The wrapping and tying material can also be inserted from either the right or left side.




Optimum film guide for safe bale tying

The CombiPack HDP guarantees an even distribution of the peripheral film across the entire bale width right over the edge. This guarantees a clean finish and reduces air pockets subsequently improving the forage quality and reducing rolling losses. The peripheral film also offers an improved level of surface protection thus stabilising the bale shape and enhancing the shelf life.

Always enough rolls in storage

The hydraulically foldable storage area of the CombiPack HDP CV 165 XC provides enough storage for long working days. In addition to two rolls of either net or peripheral film in the tying system another two rolls of net or peripheral film can be transported. In addition, there is enough room to store 16 rolls of wrapping film, ensuring there is always enough material for a smooth workflow.

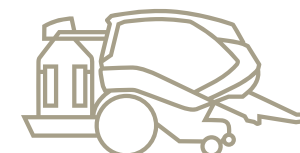

The wrapping device

For a perfect result



Wrapping with a system


- **Transfer in just 6 seconds –**
for maximum pressing throughput rate
- **Four belts and guide rolls**
ensure safe bale position
- **Wrapping speed of 40 rpm**
providing maximum efficiency
- **Individually adjustable film pre-stretching**
for optimum overlaps
- **360° sensor monitoring**
for exact bale position and even wrapping
- **Reliable wrapping process even on slopes**

Regardless of whether you are working on a slope or plain – the wrapping process is completed quickly, accurately and completely reliably. Intelligent sensors, high rotational speeds and a well-designed bale transfer guarantee short cycle times at maximum quality and safe handling on any terrain.



Extremely fast transfers

The complete transfer cycle only takes 6 seconds. As soon as the bale chamber opens, the bale is actively placed on the wrapping table. A bale lifter underneath the bale ensures it is transferred safely, especially on slopes. The bale chamber closes again directly after the transfer to prepare the next bale.

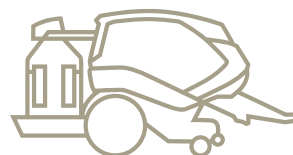



Secure fit

The wrapping table is fitted with four belts that form a deep trough and securely hold the bale in place. This design prevents any slipping or tilting, especially on steep surfaces. In addition, four guide rolls guarantee a smooth wrapping process, even on slopes.



Absolute top performance

The wrapping arms of the CombiPack HDP provide fast and high-performance bale wrapping at a rotational speed of up to 40 rpm. Thanks to this high speed, the bale is already fully wrapped before the next bale has been fully pressed. The film pre-stretching can be easily adjusted between 55% and 70% to guarantee the best possible quality.



Accurate wrapping process thanks to sensor monitoring

A 360° rotary position sensor monitors the rotation of the wrapping device and ensures the exact positioning and even film overlapping. If a film tear is detected, the driver receives an appropriate message on the terminal. The driver can then decide at the touch of a button whether the bale should just continue to be wrapped with one film roll or whether a new roll should be inserted. Only once this has been confirmed will the bale rotation be adjusted accordingly to guarantee a consistently high product quality and the best forage.

The wrapping device

For a perfect result



Perfect wraps for top quality forage

The optional re-turning mode ensures that the bale is turned again on the wrapping table before it is ejected. During this process, air is pushed out from underneath the film, reducing the amount of oxygen and improving the forage quality. The bale mat provided as standard guarantees gentle depositing ensuring that the bale is not damaged by the chaff. The bale can optionally be deposited on the front side using a bale turner.




Convenient tail control unit

The control panel provided as standard on the rear side of the machine enables the simple control of all of the important functions directly on site. From the wrapping device to the holding and cutting device and bale transfer unit, everything can be operated easily and accurately. To make it even more convenient, the film magazine can be lowered so that reloading film can be completed quickly while sparing the operator's back.



Efficient bale discharge – faster and gentler

If you do not want the bales to be wrapped, the wrapping table can be used for depositing the bales in pairs. Two bales can thus be deposited at once, which will significantly reduce the amount of time it takes to clear the field.

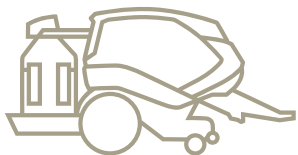



Hitch system and running gear

Flexibility and power combined



Hitch and set off

The CombiPack HDP can be operated flexibly with a bottom or top hitching. Suitable couplings are available for every tractor. The optimised universal shaft design guarantees maximum power transmission regardless of which variant is selected.




Easy to manoeuvre, simple roll changes

The hydraulically adjustable articulated drawbar also enables you to easily access entrances to fields that are tight and difficult to drive on. The articulated drawbar can be moved down fully so that net rolls can be changed easily. The height can conveniently be adjusted from the tractor cabin. An adjustable support jack is no longer required to connect and disconnect the machine.



Maximum precision and sward protection

The CombiPack HDP relies on a large scale single axle that offers excellent manoeuvrability as well as maximum sward protection. The 650/65 R 26.5 size tyres provide a large contact surface guaranteeing minimal ground pressure, while the alternative 600/60 R 30.5 size tyres also offer outstanding slope stability. The 710/55 R 30.5 tyres are also available as an option. The generously dimensioned tyres preserve the sward even during tight turning manoeuvres and when reversing. At the same time, they prevent forage contamination and provide optimum traction on all terrains.

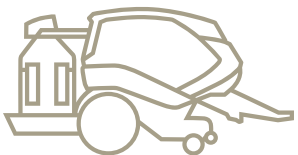

Safe travel

- **Bottom and top hitching** – suitable for every tractor
- **Optimised universal shaft design** for maximum power transmission
- **Adjustable articulated drawbar system** for tight turning manoeuvres and use on slopes
- **Easy mounting and dismounting thanks to hydraulically adjustable articulated drawbar**
- **Large-scale single axle** for maximum ground clearance and high level of stability
- **Tyres 600/60 R 30.5** – sward protection and plenty of traction
- **Compressed air brake as standard**

The CombiPack HDP convinces with its highly flexible hitch system, excellent handling on the field and maximum safety on the road. Manoeuvrability, comfort and traction combined in a well-designed concept.



Safe road travel

The machine is fitted with a compressed air brake system as standard to ensure it is safe to drive on the road.

KRONE operating terminals

Clear, intuitive *and convenient to use*

Straightforward control concepts

- **Take your choice –**
our control units suit all needs
- **Convenient –**
clear and user-friendly interfaces
- **ISOBUS compatible –**
connecting with the tractor terminal
- **High technology –**
the baler controls the tractor

Working with KRONE's comfort on-board electronics is simply fun: it simplifies, optimises and speeds up the operation of the CombiPack HDP round baler. Three KRONE operating terminals are available for different tasks.



Operating terminal DS 500

The DS 500 operating terminal with 5.7" colour display is available as an option and can either be operated via twelve function keys or a touchscreen. It provides the option of conveniently setting the relevant values, such as the bale diameter, net layers and start of the tying process. The terminal also includes several customer counters, two season counters, an operating hours counter and diagnostic functions for the sensors and actuators.



The CCI 800 and CCI 1200 operating terminals

The CCI 800 and CCI 1200 operating terminals have an 8" or 12" colour display with touch function. display the machine controls and camera footage side by side on the same screen. Both terminals are ISOBUS-compatible and therefore prepared for use with other machines.




Existing tractor operating terminals

If the operating terminal on the tractor is ISOBUS compatible, it can be used to directly control the on-board electronic system of the CombiPack HDP. There is no need for an additional terminal, which also significantly simplifies operation.



KRONE SmartBale app

KRONE SmartBale displays all deposited round and square bales on a bale map. Depending on the baler equipment, the SmartBale app provides additional information such as moisture, weight, dimensions and whether the crops have been cut. Moist bales are colour-coded so that they can be easily identified and stored separately.

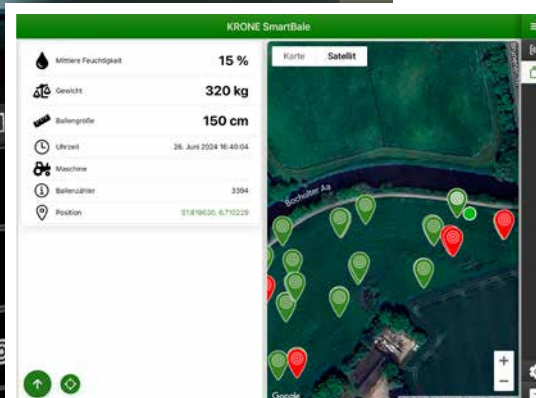

The baler manages the tractor

TIM (Tractor Implement Management) allows your machine to communicate with the tractor and control it. At this point the tractor is halted automatically too. After chamber film or net has been applied, the rear door opens, the bale is ejected and the door closes again. All the operator needs to do for starting the next cycle is pull off the tractor. TIM reduces operator fatigue, downtimes, fuel consumption and leads to more uniform bales and boosted productivity.



Cleaning and maintenance

Ensuring everything runs smoothly



Panoramic view – even when it is dark

The working lights of the CombiPack HDP, that are provided as standard, ensure optimum visibility and increase operator comfort at all times of day and night. The areas around the pick-up, rotor, roll holder for reservoir rolls and wrapping table are specifically illuminated so that work can be completed accurately even in difficult light conditions.

The LED maintenance lighting also illuminates the tying unit, the area underneath the side guards and the bale ejection tailgate. This ensures that any maintenance work and the bale handling process are even safer and more convenient.





Maintenance made easy – clean and efficient

The CombiPack HDP is equipped with a central lubrication unit that reliably and evenly supplies all of the relevant components with lubricant. This reduces the required amount of maintenance work, extends the service life of the machine and ensures smooth operation even under the toughest conditions. The gear-assisted drive train ensures that the machine remains clean as no additional oil lubrication is required, guaranteeing maximum efficiency and minimal downtimes.



Low-maintenance

A robust gearbox reliably drives the baling belt and cutting unit – one oil change per year is sufficient. Only two chains are required to drive the baler and cleaning roller. This in turn reduces the amount of maintenance work to a minimum, so that no additional work is required throughout the season.

Maintenance made easy

- **Central lubrication unit**
automatically supplies all of the relevant components
- **Low-maintenance drives**
reducing the number of oil changes and readjustments
- **Gearbox-protected baler drive**
for clean, efficient performance
- **LED work and maintenance lighting**
providing a clear overview during the day and at night
- **Targeted illumination**
of the rotor, pick-up, roll holder for reservoir rolls and tying unit

The KRONE CombiPack HDP convinces with its automatic central lubrication, low-maintenance drives and well-designed accessibility to all of the relevant components. Maintenance work can thus be completed quickly and cleanly, minimising downtimes and maximising operational readiness.

The KRONE net wraps and silage films

Take on any challenge



KRONE excellent Edge X-tra

The tried-and-tested KRONE excellent Edge X-tra is ideal for any crops and any round baler and covers the bale slightly beyond its edges. Its perfect edge to edge spreading technology protects your valuable crops and achieves optimum results.



KRONE excellent StrongEdge²

This is the extra strong net among the KRONE net wrap products. With two warp threads combined into one thread, this net offers an enormous resistance to tearing, larger meshing and excellent UV-stability – properties that make it particularly suitable for use in hot and sunny regions and for gathering coarse crops.



The KRONE excellent Slide wrapping film

The KRONE excellent Slide wrapping film has seven layers and a thickness of 25 µm. is a high-quality product that offers the best possible silage results and highest forage quality.



KRONE excellent Slide Extra

Thanks to a special manufacturing technique, KRONE excellent Slide Extra has a particularly high oxygen barrier which is 20µm thick. The big advantage is the length of the material: Each roll is 2,000m long. This means that the roll is 500m longer than the KRONE excellent Slide with a width of 750mm. This means: more bales per roll. Slide Extra is the best combination for round bales with previous film wrapping.



The KRONE excellent Slide Smart wrapping film

This film wrap is a very cost-effective, 5-layer film that offers all the good wrapping features. This wrap is used by KRONE customers around the world who operate their machines in normal conditions.



The KRONE excellent RoundWrap peripheral film

The KRONE excellent RoundWrap peripheral film is used instead of net wrap. The 5-layer film covers the bale over the edges and maintains the bale shape thanks of its excellent adhesive quality and so adds even more quality to your silage.



Your KRONE films and nets are available from your KRONE dealer – simply scan the QR code!

Quality you can depend on

- **Always the correct wrap –**
genuine KRONE net and film wraps
- **High-quality material –**
resistant to tear and puncture
- **Matching –**
Proper quality for all harvesting conditions
- **Peace of mind –**
perfect bales for perfect harvest results

The KRONE excellent bale packaging – rely on the genuine product. There are many reasons to opt for genuine net wraps and silage films. Genuine wraps reduce the costs per bales substantially, protect your valuable crop and lead to higher-quality forage. KRONE excellent crop packaging pays dividends.

Technical data

Variable bale diameters *with or without cutting unit*



Round baler

CombiPack HDP

Bale size (diameter x width)		Approx. m	1.0 x 1.65
XCut rotor cutter	nominal chop length from 41 blades	approx. mm	27
Machine dimensions (l by w by h)*		approx. m	7.83 x 2.99 x 3.30
Tractor power		approx. kW/hp	110/150
Tractor attachment	40 mm hitch ring		Standard
	80 hitch ball		Option
Pick-up work width		Approx. m	2.24
Bale tying	Double twine tying system		Standard
	Net and film tying		Standard
Axles	Single axle including compressed air, parking and hydraulic brakes		Standard
Tyres	650/65 R 26.5		Standard
	600/60R30.5		Option
	710/55 R30.5		Option
Operator terminals	DS 500		Option
	CCI 800		Option
	CCI 1200		Option
Hydraulic system			Load Sensing (min. 90 l/min.)
Other optional accessories	Camera system, safety chain, various drawbar eyes, additional blades, additional warranty		



Discover the advantages


 mykrone .green



KRONE SmartTelematics Plus gives you access not only to your machine's performance data but also to many other practical functions for evaluating the data, e.g.

- a geofencing function
- export of machine & yield data as Excel and ISOXML files
- visualisation of all ingredient values measured by the NIR sensor as a yield map
- export of the yield maps as a shape file

KRONE SmartTelematics Plus is available in our E-Solutions Shop.

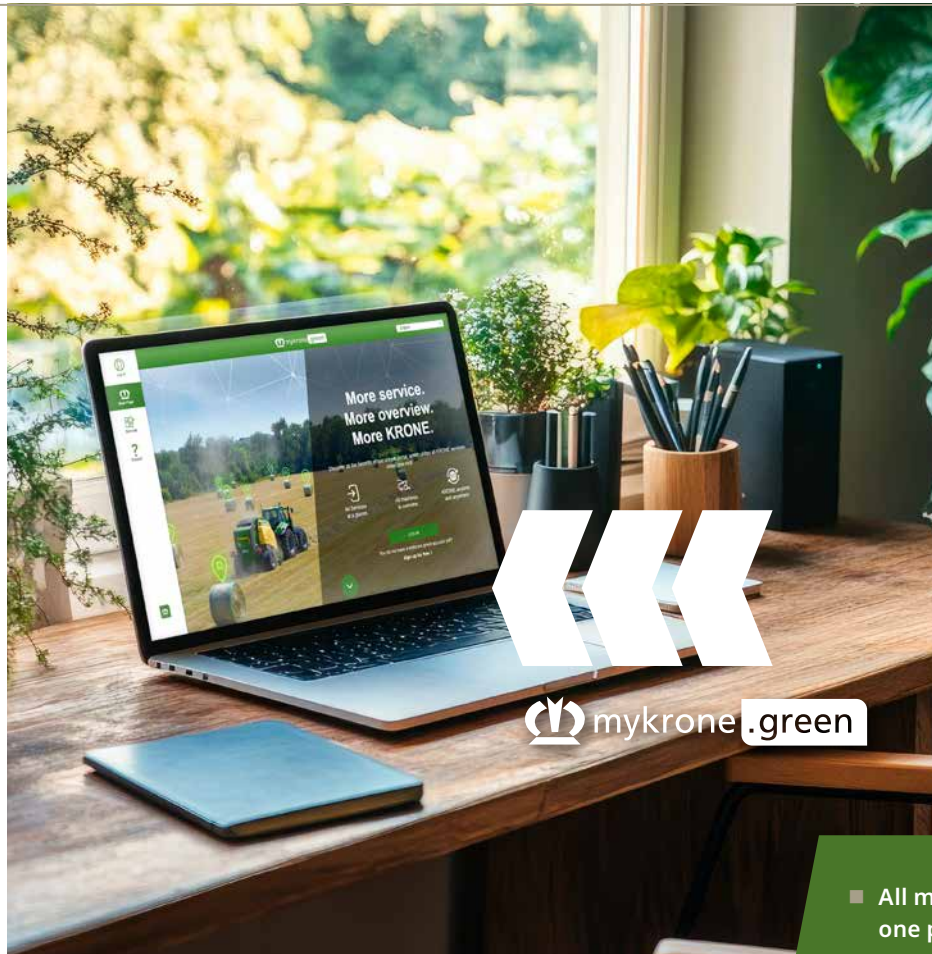

Extend the warranty of your new or nearly new KRONE machine with **Warranty Plus** – available in the E-Solutions Shop





- All machine data digitally in one place
- Analysing and evaluating machine data – for maximum efficiency
- Exclusive performance upgrades for your machine
- Independent ordering of spare parts from your dealer's parts shop

All digital services relating to your KRONE machine can be found in our customer portal **mykrone.green**. Maintain an overview and get the best out of your machines.

Simply create a user account, register your business and get started: track telemetry data in real time, have technical documents to hand at all times or book digital function extensions. **Everything centralised, everything digital – always with you.**

If you have any questions, please contact our mykrone.green team at **support@mykrone.green**.

Find out more now!

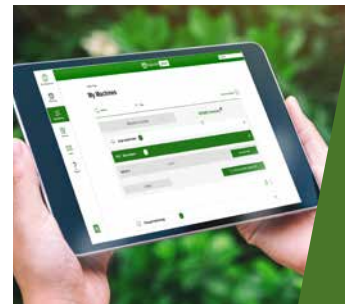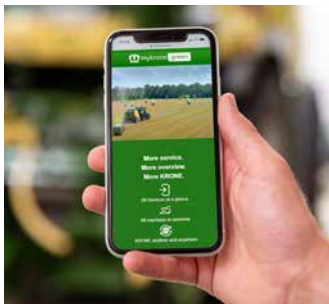



Maschinenfabrik Bernard KRONE GmbH & Co. KG
Heinrich-Krone-Straße 10
D-48480 Spelle
Phone: +49 (0) 5977 935-0
info.ldm@krone.de | www.krone-agriculture.com

Your KRONE dealer